

Benefits of resource strategy for sustainable materials research and development

Christoph Helbig, Christoph Kolotzek, Andrea Thorenz, Armin Reller, Axel Tuma, Mario Schafnitzel, Stephan Krohns

Angaben zur Veröffentlichung / Publication details:

Helbig, Christoph, Christoph Kolotzek, Andrea Thorenz, Armin Reller, Axel Tuma, Mario Schafnitzel, and Stephan Krohns. 2017. "Benefits of resource strategy for sustainable materials research and development." *Sustainable Materials and Technologies* 12: 1–8. <https://doi.org/10.1016/j.susmat.2017.01.004>.

Benefits of resource strategy for sustainable materials research and development

Christoph Helbig^b, Christoph Kolotzek^b, Andrea Thorenz^b, Armin Reller^b, Axel Tuma^b, Mario Schafnitzel^a, Stephan Krohns^{a,*}

^a Experimental Physics V, Center for Electronic Correlations and Magnetism, University of Augsburg, 86159 Augsburg, Germany

^b Resource Lab, Institute for Materials Resource Management, University of Augsburg, 86159 Augsburg, Germany

A B S T R A C T

Material and product life cycles are based on complex value chains of technology-specific elements. Resource strategy aspects of essential and strategic raw materials have a direct impact on applications of new functionalized materials or the development of novel products. Thus, an urgent challenge of modern materials science is to obtain information about the supply risk and environmental aspects of resource utilization, especially at an early stage of basic research. Combining the fields of materials science, industrial engineering and resource strategy enables a multidisciplinary research approach to identify specific risks within the value chain, aggregated as the so-called 'resource criticality'. Here, we demonstrate a step-by-step criticality assessment in the sector of basic materials research for multifunctional hexagonal manganite YMnO_3 , which can be a candidate for future electronic systems. Raw material restrictions can be quantitatively identified, even at such an early stage of materials research, from eleven long-term indicators including our new developed Sector Competition Index. This approach for resource strategy for modern material science integrates two objective targets: reduced supply risk and enhanced environmental sustainability of new functionalized materials, showing drawbacks but also benefits towards a sustainable materials research and development.

1. Resource strategy

The global way of life is based on intensive consumption of energy and mineral resources. Many technologies with significant socio-economic benefits require materials that are problematic due to instable, insecure or price-volatile supply [1]. Moreover, the complexity of their global supply chains leads to an increasingly precarious scenario. The sustainable extraction and use of scarce natural resources are essential tasks to reach a resource efficient techno-economic development in the future [2]. The analysis of key technologies and processes of mega sectors shows their increasing dependency on availability of strategic metals and minerals, which is often limited [3]. The whole lifecycle (e.g. extraction, processing, pre-production, production, use-phase, recycling) of raw materials goes hand in hand with significant supply risks and environmental impacts. Applying criteria, like geologic availability, geo-political dependencies, ecological compatibility and reusability of novel materials along the complete material and product lifecycle are innovative and strongly recommended directions of materials science [4,5].

More precisely, in so called mega sectors [3] like the energy sector, high technology applications, e.g. as thin-film photovoltaic for power supply [6], supercapacitors for energy storage systems or power-to-gas technology for energy transformation, implement many different elements within their functional building blocks [7], demonstrating the complexity of its upstream value chain. Scarcities or upcoming restrictions of those strategic elements [1] for essential functions like cadmium telluride utilized as p-doped semiconductor adsorber layer for light-to-energy conversion in thin-film photovoltaic systems have a strong impact on the success of those products and technologies [8]. A challenging task for modern materials science is to develop high-performance materials utilizing abundant elements to replace critical ones in existing and future technologies [5,7,8]. Therefore not only technical material parameters are essential quantities, but also the identification of raw material restrictions or benefits. Often, criticality of elements is considered first at an advanced stage of product development [8–10], during end-of-life recycling scenarios [11,12] or the concepts include only specific aspects of materials efficiency [13] or raw materials supply [14–16]. Recent comprehensive criticality studies [3,17–19] consider in detail dimensions of supply risk, environmental implications and vulnerability to supply restrictions within global, national and corporate perspectives. However, for basic materials research at an early development

* Corresponding author.

E-mail address: stephan.krohns@physik.uni-augsburg.de (S. Krohns).

stage the final product made by a functionalized material is not explicitly conceivable. Only mega sectors can be addressed for a possible future application.

Here, we specify a practical guideline for materials scientists to consider criticality aspects following a multidisciplinary evaluation for the use of raw materials. Indicators within the scope of reduced supply risk and enhanced environmental sustainability were identified from literature analysis [3,17,20,21]. These indicators were evaluated by experts from the fields of material science, physics, resource strategy and economics concerning their relevance within the basic research perspective, leading to a set of eleven indicators, listed in Fig. 2 (with details in tables S1 and S2 in the Supplementary Material). All indicators of this set have a long-term and forecasting perspective, contain non-redundant information and possess adequate data quality. The newly developed Sector Competition Index (SCI) comprises the predominant raw materials consumption in mega sectors accounting for the specific value added per material input. This multidisciplinary approach serves as a guideline for materials scientists for a sustainable and more resource-efficient material development. Here, it is based on a generation of reliable data containing geographically allocated reserves, production sites and resource supply dominating countries.

We illustrate the method on a multifunctional hexagonal manganite YMnO_3 [22]. This compound is a promising candidate for spintronics [23], non-volatile memory materials [24], domain-wall engineered multiferroic properties [25,26] at room temperature, or the direct electrically tuned exchange bias in YMnO_3 /permalloy heterostructures [27]. These fascinating properties open new fields for future applications due to its geometrically driven improper ferroelectric ordering [28] accompanied by a structural six fold ferroelectric domain structure exhibiting topological protected vortices [29]. Recently, high dielectric constant and appropriate loss tangents at ambient temperature have been demonstrated in these materials, allowing good prospects for YMnO_3 to be also used as dielectric in high power capacitors for energy storage and conversion [30].

For YMnO_3 , we focus on the basic research stage and assume a future "virtual usability" for this compound as a functional material in electronic building blocks. Due to the negligible amount of raw material required for research activities, restrictions concerning resource availabilities rarely occur already at this stage of product lifecycle, but may become an important factor in further development stages and technology spread. Our more simplified previous approach [5] for colossal dielectric constant materials demonstrated the benefits of knowing the criticality of the raw materials at this stage to prevent or even know risks in advance. For the present approach we derive the supply risk and environmental impacts of the two elements yttrium and manganese. The development of the supply risk indicators are discussed on an annual basis from 1995 to 2013.

2. Materials and product lifecycle

For the perspective of basic materials research a holistic approach is needed [31], especially taking into account long-term and forecasting criteria for raw material supply and production [3]. Therefore a multi-level product lifecycle for an implemented material is anticipated to identify development stages and upcoming risks based on raw materials usage. These risks are expressed by manifold indicators, which comprise technological [32], geological [33], geopolitical [14], economic [34,35], social [36] and environmental aspects [37]. The progress of a technology passes specific development stages from basic research to ready-to-use product, representing the resource-based approach of the material and product lifecycle. These stages are subjected to different disciplines like material sciences, industrial engineering, resource strategy and economics.

Within Fig. 1 we show a simplified view of various phases derived from the complex multidisciplinary and intersectional network of technology and product development: Basic research, technical development,

application and re-phase. While basic research includes the conceptual functionalization of a material, in the technical development phases, the prototypical implementation for a specific product is carried out. Within the application phase the focus lies on production techniques for industrial upscaling as well as resource and energy efficiency aspects. Closing of material cycles across the whole material and product lifecycle is a necessity, thus closed-loop supply chains are established in the re-phase by recycling, remanufacturing and reuse [38,39].

The value chain in each level of Fig. 1 describes progress in material and product development (basic research and technology development) as well as industrial lifecycle (application and re-phase). Identification and classification of risks for all four lifecycle levels are prerequisite to develop risk mitigation strategies in order to achieve a sustainable use of functionalized resources. Many metals and metalloids show recycling rates below 1% [12]. Hence, there is potential for improvement in the design of industrial lifecycles, theoretically these materials can be recycled infinitely. Closing these material cycles would also allow for alternative material supply accompanied by reduced carbon emissions [40]. A detailed analysis of risks by combining efforts of a multidisciplinary research team, especially at the basic research level, can determine possible bottlenecks or benefits by functionalization of new materials early in a products lifecycle. A more resource-efficient use of scarce materials can be achieved or mitigation strategies developed. It is of high interest to compare criticality scores derived by this long-term approach with future criticality assessments of the same materials utilized in novel products.

Material scientists could use existing criticality assessments for a first estimate. However, all existing studies provide limited information for long-term developments. E.g. the broad coverage of metals and metalloids by Graedel and colleagues comes at the cost of only two supply risk indicators in the long-term perspective (depletion time and companion metal fraction) [18]. Other assessments either have a short- to medium-term perspective [41], a national focus [42] or only applied their method to a small set of raw materials. Therefore, we present a guideline for basic materials research on an international scale emphasizing long-term indicators.

3. Criticality assessment

3.1. Guideline for criticality assessment in basic research

The step-by-step guideline for a resource strategy in materials science is displayed in Fig. 2, which represents in more detail the basic research level of Fig. 1. It focuses on reliable information that is accessible for material scientists. The guideline starts with an analysis of the research material requirements for the desired function and the corresponding value chain (A). The second step implements analyses of data on raw material concerning data availability and quality (B), with consideration of geographically localized information for all risk indicators. Suitable risk mitigating solutions can be assessed by calculating these indicators in the supply risk and environmental perspective (C). A detailed description for calculation of each indicator is provided in the Supplementary Material (Table S1 and S2). The guideline finishes with an interpretation and conclusion.

3.1.1. Value chain (A)

Initially, material scientists need to become aware of material demands concerning aspects of purity of raw material or manufacturing techniques within preprocessing, in order to address inter alia specific environmental impacts or market concentration. Data analysis is either carried out on a global level or has a regional focus. For this purpose, data sources for the various indicators include scientific journal articles (like metal recycling rates [12,43]), administrative institution reports (like USGS [33]) or proprietary consultant information (like SNL Metals & Mining [44]). If necessary, data gaps can be closed by consulting a resource strategy expert.

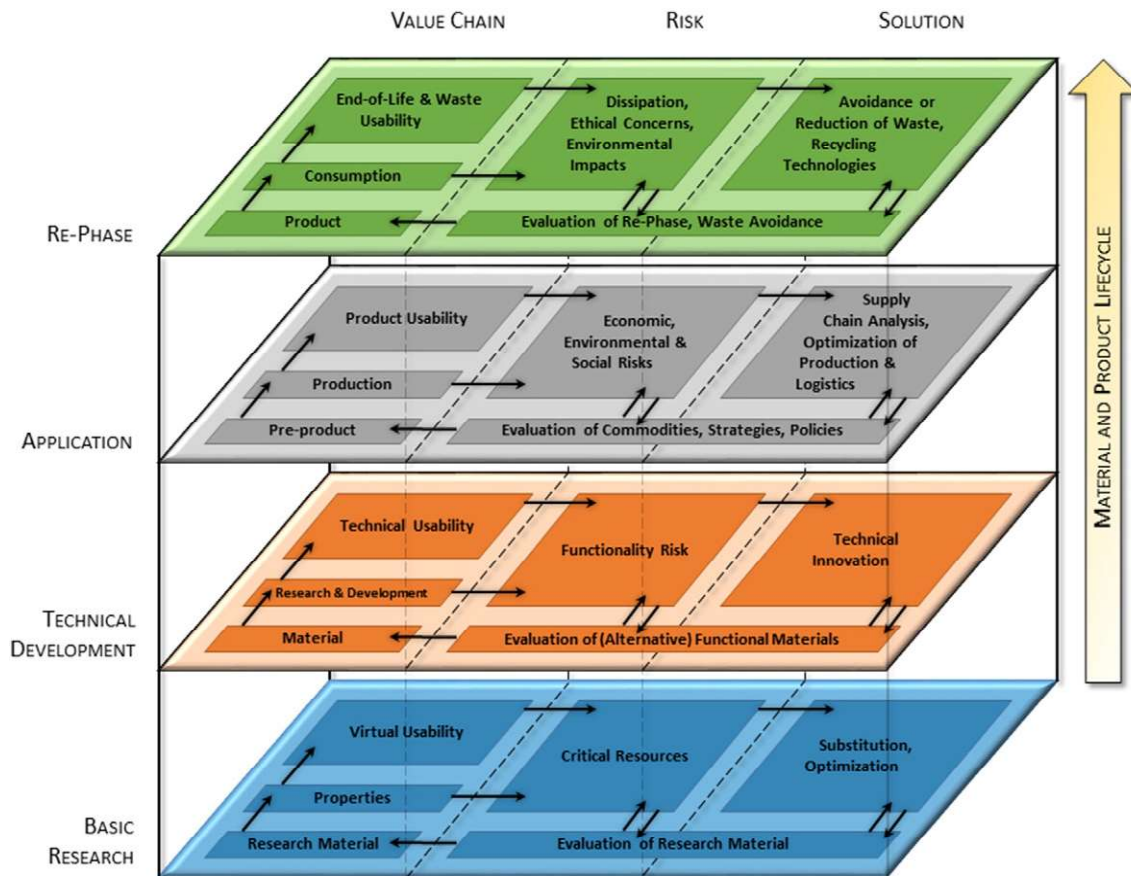


Fig. 1. Intersectoral, multidisciplinary aspects of material and product lifecycles. The four-level architecture represents basic research (blue), technical development of a material for a prototypical application (orange), application (grey) and the re-phase (green), displayed from bottom to top. Each level includes the value chain of a material or product life cycle, their concomitant risks and suitable risk mitigation strategies.

3.1.2. Data acquisition and indicators (B)

The eleven indicators consist of nine indicators for supply risk and two indicators for environmental impacts. Region-specific data is required for some supply risk indicators. The environmental evaluation is carried out without further geographic localization. In more detail, supply risk indicators particularly assess long-term effects concerning geological, geopolitical and technological aspects, of which most are frequently used as supply risk indicators in various criticality assessments. Geological supply risk indicators include the static reach of reserves and by-product dependence. The static reach of reserves calculates the ratio between reserves estimations and annual primary production [45]. The by-product dependence is calculated as the share of primary production that originates from mines, which have other host minerals [16]. Geopolitical aspects are covered by the country concentration including both reserves and production as well as country risks concerning policy perception [46] and political stability [14]. Country and company concentrations are calculated as the Herfindahl-Hirschman-Index (HHI) of the mining or refining activities of producing countries or companies. The country risk policy perception is determined as an average of the policy perception of those producing countries, weighted by the primary production shares. Considering a country-average of the Political Stability and Absence of Violence/Terrorism meta-indicator from the Worldwide Governance Indicators, again weighted by the primary production shares [14] leads to the country risk political stability. Technological supply risk aspects take into account future technology demand [32] and end-of-life recycling rate [12]. The demand increase due to future technologies is the ratio between estimated additional 2030 demand from identified future technologies in comparison to 2006 production volumes [32]. End-of-life recycling rate is the ratio between material recycled from old-scrap and discarded

material. Additionally, the new Sector Competition Index measures the average value added per mass flow weighted by mega sector application shares, which is further described in Section 3.2. The environmental perspective follows the ReCiPe method (v1.08) in its endpoint categories Human Health and Ecosystem Quality [47] taken from the ecoinvent (v2.2) life cycle database [48].

3.1.3. Criticality assessment—solution (C)

The interpretation of criticality indicators includes the installation of thresholds for each indicator and the harmonization of data scales. Each indicator is normalized to a score between 0 and 100, as described in the Supplementary Material (Table S1 and S2). For the supply risk dimension a total score is achieved by equal weighting of each indicator. Results of two alternative weighting options are displayed in the Supplementary Material (Table S3 and Fig. S2). ‘Hierarchist’ normalization and ‘average’ weighting for the European region are used for all environmental impact data [47]. Mitigation strategies, like improved resource efficiency or material substitution, are derived and depend on criticality assessment, especially focusing on individual indicator results (see also Tables S1 and S2).

3.2. Sector competition index

The Sector Competition Index is a new developed indicator of key relevance for the supply risk indicator set addressing the problem of competing raw material demand from specific industrial sectors. From a material scientist’s perspective, it is important to know if the required raw material is predominantly used in sectors that are able to pay high resource prices. This is expressed by a higher ratio between value added and

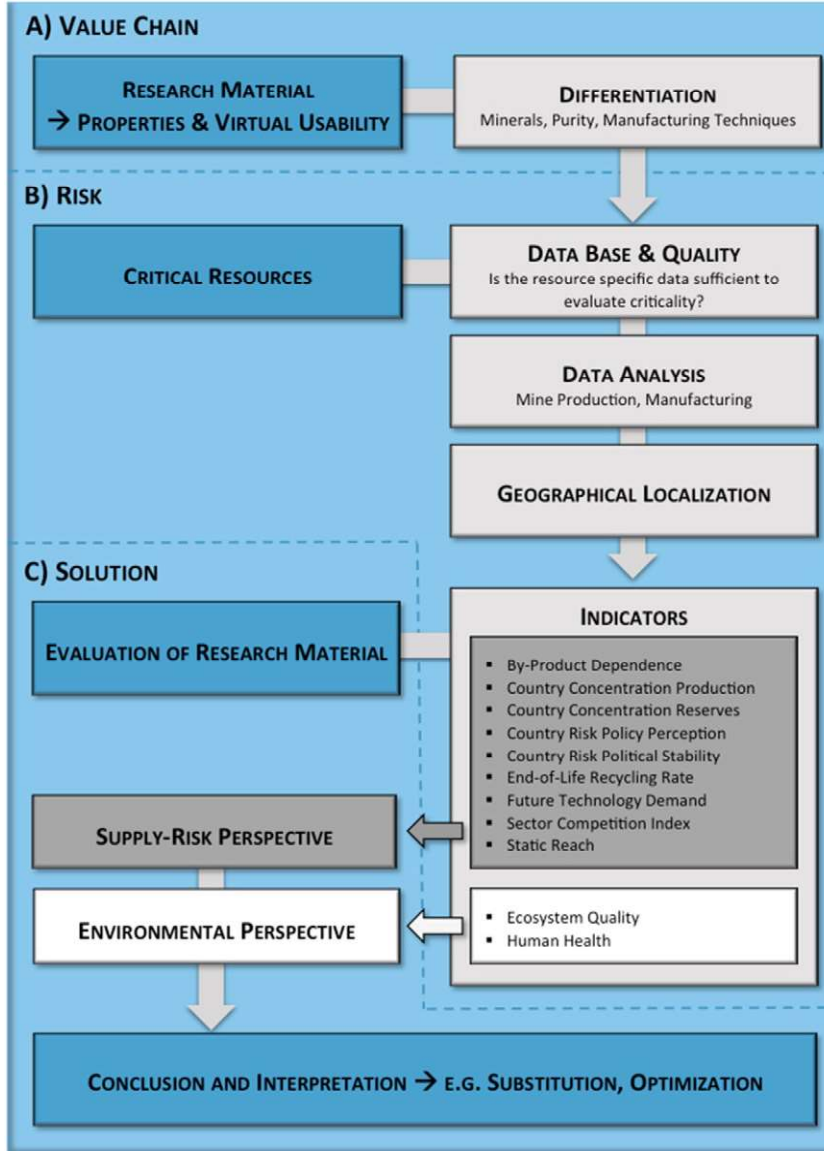


Fig. 2. Guideline for criticality assessment in materials science. Resource-based criticality approach, starting with Value Chain (A), addressing the research material, its properties and a possible usage in a mega sector. This implies raw material and preproduction processes like purification and starting minerals. Databases are employed to determine the data set for specific Risks (B) within the value chain. Essential indicators are calculated using the data set and are grouped into two perspectives: supply risk and environmental. The aggregation of these indicators are already part of Solution (C), which allow to determine the resource criticality of used raw materials based on these quantified indicators.

raw material input per sector, defining the sector resource productivity. Competing against highly productive mega sectors in terms of demand implies a supply risk, as these sectors are able to secure prioritized supply of raw materials because of their high specific value added. Fig. 3 displays the value added per material input of 17 mega sectors identified in the EU study on critical raw materials for the EU of 2014 [3]. The sector resource productivity P_s of a sector s is the value added VA_s per total mass of utilized material m_s , which is the sum of all resources m_{rs} in this sector:

$$P_s = \frac{VA_s}{m_s} = \frac{VA_s}{\sum_r m_{rs}} \quad (1)$$

The least productive sector according to the EU study [3] data has been construction material, closely followed by metal applications. The highest productivities have been identified for the applications refining and pharmaceuticals as well as electronics and information and communication technology (ICT).

In order to calculate a resource-specific indicator, the Sector Competition Index (SCI_r) is calculated from rescaled resource productivities of the

sectors, weighted by application share (the ratio between mass of a resource used in a sector m_{rs} and total production of the resource m_r). The rescaling of a normalized productivity P_s^* assumes a logarithmical relation between criticality of a resource, expressed on a scale from 0 to 100 and resource productivity P_s of its application sectors. Therefore the least productive sector is set to 0 and the most productive sector to 100:

$$SCI_r = \sum_s \frac{m_{rs}}{m_r} P_s^* = 100 \sum_s \frac{m_{rs}}{m_r} \frac{\log \frac{P_s}{\min_s P_s}}{\log \frac{\max_s P_s}{\min_s P_s}} \quad (2)$$

The Sector Competition Index is calculated for 54 major materials (more details are in Fig. S1). The highest scores are derived for indium, gallium, germanium and tellurium, exceeding values of 40, all of them frequently used in the electronics and ICT industry. The lowest scores, all below 2, are for chromium, coking coal, gypsum, nickel, sawn softwood, which are mass metals or non-metal raw materials.

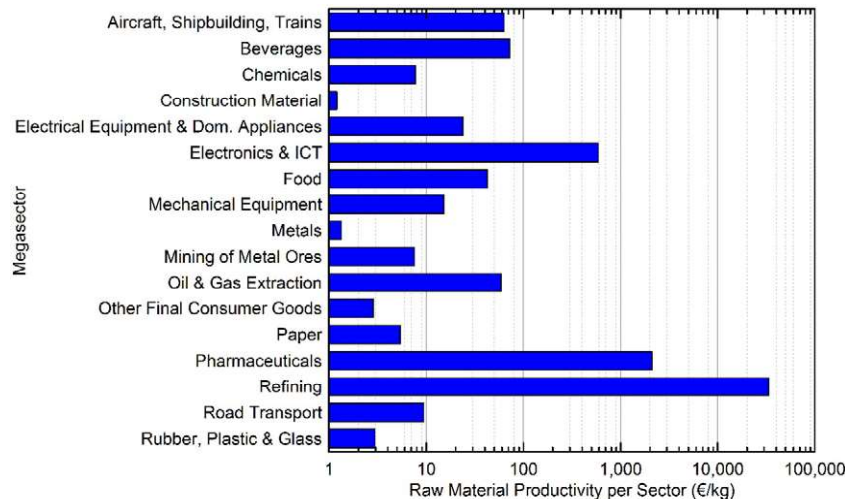


Fig. 3. Sector-specific resource productivities for year 2010. Mega sectors displayed versus the logarithmic raw material productivity (€/kg). Productivity has been calculated as value added of each megasector divided by total material input, according to the European Commission [3].

4. Results and discussion of resource criticality of YMnO_3

The resource-strategic criticality assessment considers potential obstacles, side-effects and impacts of material utilization and accompanies the product and material development. Following the guideline presented in Fig. 2 and Section 3.1, we apply it to both embodied metals of hexagonal manganite: rare earth element yttrium and transition metal manganese. For both elements necessary databases are analyzed, gaining sufficient resource-, and region-specific information to quantitatively evaluate the supply risk and environmental perspective.

Trends and consistency of the derived criticality indicators are displayed by their historic development. Fig. 4 shows the timeline for both considered elements for various indicators: reserves (a), mining production (b), resulting static reach of reserves (c), country concentration mining and reserves (d), political stability of mining countries (e) and the total supply risk scores (equal weighting) for the time span from 1995 to 2013 (f). The data in a)–e) are in units as collected from data sources, prior to criticality determination, allowing for full interpretation. The environmental implications are not reevaluated on an annual basis within the Ecoinvent database. In particular, for yttrium and manganese, only a single data set for 2010 is available.

The development of the supply risk scores exhibits an almost constant time-dependent behavior except for two step-like increases from 2004 to 2006 for yttrium and from 2001 to 2002 for manganese, respectively (Fig. 4f). The increase for yttrium is explained by quadrupled primary production, which is depicted in Fig. 4b. This production was mainly covered by China, leading to both a decreased static reach of Yttrium (4c) and a slight further increase of the country concentration (4d). For manganese, the increase in criticality originates from a reevaluation of South African reserves in 2002 [49] (c.f. Fig. 4a), resulting in a significantly decreased static reach (4c), which changed from 87 years in 2001 to 36 years in 2002. Further deviations from a constant behavior in reserves and production (4a, 4b) compensate each other with no further impact on the static reach. E.g. the manganese primary production volumes and reserves outside of South Africa have simultaneously gradually increased. In addition, the mentioned reevaluation of South African reserves lowered the country concentration of reserves (4d). The time-dependent change of political stability of production countries for both elements influences the supply risks only marginally.

All eleven indicators for manganese and yttrium are listed in Fig. 5: nine for supply risk for 2013 and two for environmental perspective for 2010, respectively. Equal weighting is used in each perspective to identify the total criticality scores of both yttrium and manganese. In the Supplementary Material (Table S3 and Fig. S2) we show a sensitivity

analysis considering two alternative weighting options: (i) equal weighting of four indicator groups and (ii) higher weighting of single indicators. The total criticality scores of each material differ due to the weighting options by a maximum of five points. For yttrium, the highest criticality scores are derived due to the nearly monopoly situation of the refining production of China and its corresponding political evaluation (Country Concentration Production). This leads to high market concentration accompanied by rather poor values for Policy Perception and Political Stability. Yttrium lacks in end-of-life recycling for 2013, giving a maximum criticality in this indicator. Ciacci and colleagues assume a future potential end-of-life recycling rate of 18%, especially from phosphor powders and garnet lasers [50]. The supply risk of yttrium is lowered by its estimated Future Technology Demand and rather low Sector Competition Index due to main use in mega sectors of little value added, e.g. chemicals industry (c.f. Fig. 3). Furthermore, high yttrium reserves lead to a long Static Reach. Even though rare earth mining is frequently accompanied by uranium and thorium ores, the overall specific environmental implications are interestingly evaluated as non-critical [51], despite the ongoing discussions on toxicology and environmental regulations [52]. Therefore, from a material scientist's perspective, future yttrium applications should be designed for recycling and a more widespread production should be pursued.

Compared to yttrium, manganese has a lower supply risk score, which mainly emerges from a reduced By-Product Dependence (manganese is generally a host metal), an even lower estimated Future Technology Demand and main uses in mega sectors with low value added, particularly in the metals sector [2] (c.f. Fig. 3). Higher supply risks are based on country concentration (mainly South Africa) and a rather short static reach (34 years). The specific environmental implications for manganese are of minor importance due to relatively high abundance of manganese in the earth's crust [53] and therefore higher ore grades and low-hazard extraction technologies [48]. Therefore, future manganese applications should particularly strive for high resource-efficiency in order to reduce overall material demand. Incentives for further development of extraction and refining technologies are required to access techno-economically more resources enhancing the static reach.

5. Conclusion

In this article, we describe a guideline for material scientists to implement resource strategy considerations in basic research of the development of functional materials. Material and product lifecycle consists of four stages: basic research, technical development, application and re-phase. Our guideline empowers material scientists to evaluate

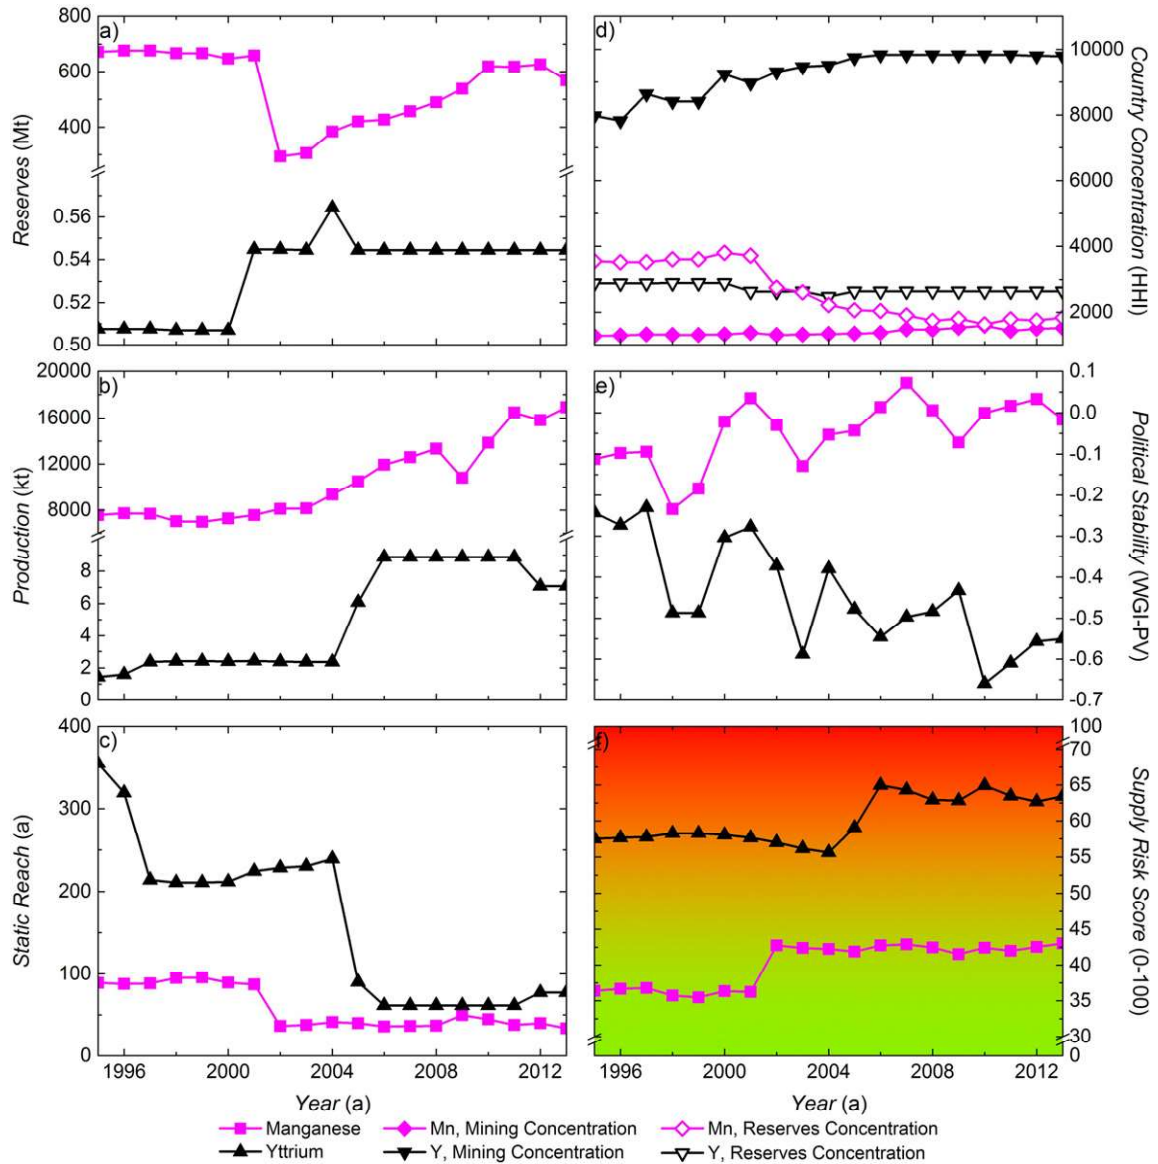


Fig. 4. Time dependent development of criticality scores of Yttrium and Manganese from 1995 to 2013. a)–e) show time dependent raw materials data of Reserves, Production, Static Reach, Country Concentration and Political Stability. The development of the total supply risk scores (equal weighting) of Yttrium and Manganese from 1995 to 2013 is shown in f), the colour code visualizes the criticality score of supply risk ranging from green (not critical) to red (critical).

Perspective	Indicator	Dimension	Yttrium		Manganese	
			Value	Score (0 - 100)	Value	Score (0 - 100)
Supply Risk	Companion Metal Fraction	%	84.30	84.30	0.00	0.00
	Country Concentration Production	HHI	9795.32	99.64	1521.06	67.05
	Country Concentration Reserves	HHI	2646.52	76.74	1840.78	70.38
	Country Risk Policy Potential	dimless	21.49	78.51	46.36	53.64
	Country Risk Political Stability	WGI-PV	-0.55	61.01	-0.02	50.33
	Demand Incr. due to Fut. Tech.	dimless	0.01	1.00	0.00	0.00
	Recycling Rate	%	0.00	100.00	53.00	47.00
	Sector Competition Index	dimless	32.50	32.50	14.60	14.60
	Static Reach Reserves	year	76.97	37.20	33.59	84.25
Environmental	Human Health	endpoints	0.69	6.60	0.20	1.98
	Ecosystem Quality	(per kg)	0.45		0.06	

Fig. 5. Criticality scores of Yttrium and Manganese. Values for the 11 indicators of the criticality assessment. Data for supply risk is for 2013, environmental data for 2010. The colour code visualizes the impact of the criticality score on materials usage for each perspective, ranging from green (not critical) to red (critical).

supply risk and environmental aspects based on raw materials. Eleven quantitative indicators utilized for this purpose allow for a holistic evaluation, embedded into the comprehensive resource strategy, that enables a long-term and future-oriented assessment. The newly developed Sector Competition Index demonstrates its importance for value added of raw material input used in mega sectors. We use this approach to analyze the resource-based prospects of a promising multifunctional material, YMnO_3 . The supply risk is evaluated for a time span of 20 years, demonstrating that for both considered elements, criticality in general remains stable over time. Possible exceptions are reevaluation of reserves or external effects like significant changes in production and consumption. Therefore, the present criticality assessment is applicable for the long-term perspective of basic research. In particular, the equally weighted indicators give rise to a moderate to high supply risk of yttrium and manganese. Conversely, environmental implications of yttrium and manganese are of low criticality. Benefits are created by identifying possible risk mitigation strategies. The time-to-market process for YMnO_3 functionalized in future products can be accelerated if for example diversified supply and design-for-recycle are considered already at basic research level, especially for yttrium. Environmental regulations for either element seem unlikely.

Implementing resource strategy concepts already at basic research stage will help to identify promising sustainable materials, improving the resource efficiency to an enhanced sustainable circular economy. This allows developing technologies that reduce the dissipative usage of scarce natural resources. It's a challenge to retrospectively derive the time-dependent evolution of materials' criticalities for all four stages of the material and product lifecycles to prove the impact of single indicators and benefits of risk mitigation strategies.

Author contributions

A.Th. and S.K. conceived and supervised the project. M.S., C.H., C.K. and A.Th. made the criticality analysis. C.H., C.K., A.Th. and S.K. wrote the paper with contributions from M.S., A.Tu. and A.R. All authors discussed the results and commented on the manuscript.

Competing interests

The authors declare no competing financial interests.

Acknowledgments

We thank Eugen Ruff from University of Augsburg, Manfred Fiebig and Dennis Meier from ETH in Zurich for helpful discussions about YMnO_3 .

This research was supported by the Federal Ministry of Education and Research via project 03EK3015 and by the Bavarian State Ministry of Education, Science and the Arts in form the of the graduate program "Resource strategy concepts for sustainable energy systems" at the Institute of Materials Resource Management (MRM) of the University of Augsburg, Germany.

Appendix A. Supplementary data

Supplementary data to this article can be found online at <http://dx.doi.org/10.1016/j.susmat.2017.01.004>.

References

- [1] Elements in short supply, *Nat. Mater.* 10 (2011) 157, <http://dx.doi.org/10.1038/nmat2985>.
- [2] T.E. Graedel, E.M. Harper, N.T. Nassar, B.K. Reck, On the materials basis of modern society, *Proc. Natl. Acad. Sci.* 112 (2015) 6295–6300, <http://dx.doi.org/10.1073/pnas.1312752110>.
- [3] European Commission, Report on critical raw materials for the EU: Report of the ad hoc working group on defining critical raw materials, European Commission, Brussels, Belgium, 2014.
- [4] E. Nakamura, K. Sato, Managing the scarcity of chemical elements, *Nat. Mater.* 10 (2011) 158–161, <http://dx.doi.org/10.1038/nmat2969>.
- [5] S. Krohns, P. Lunkenheimer, S. Meissner, A. Reller, B. Gleich, A. Rathgeber, T. Gaugler, H.U. Buhl, D.C. Sinclair, A. Loidl, The route to resource-efficient novel materials, *Nat. Mater.* 10 (2011) 899–901, <http://dx.doi.org/10.1038/nmat3180>.
- [6] C. Helbig, A.M. Bradshaw, C. Kolotzek, A. Thorenz, A. Tuma, Supply risks associated with CdTe and CIGS thin-film photovoltaics, *Appl. Energy* 178 (2016) 422–433, <http://dx.doi.org/10.1016/j.apenergy.2016.06.102>.
- [7] V. Zepf, J. Simmons, A. Reller, M. Ashfield, C. Rennie, Materials critical to the energy industry. An Introduction, second ed. BP p.l.c., London, 2014.
- [8] R.L. Moss, E. Tzimas, H. Kara, P. Willis, J. Kooroshy, The potential risks from metals bottlenecks to the deployment of strategic energy technologies, *Energy Policy* 55 (2013) 556–564, <http://dx.doi.org/10.1016/j.enpol.2012.12.053>.
- [9] T.E. Graedel, P. Nuss, Employing considerations of criticality in product design, *JOM* 66 (2014) 2360–2366, <http://dx.doi.org/10.1007/s11837-014-1188-4>.
- [10] C. Kolotzek, C. Helbig, A. Thorenz, A. Reller, A. Tuma, unpublished, n.d.
- [11] B.K. Reck, T.E. Graedel, Challenges in metal recycling, *Science* 337 (2012) 690–695, <http://dx.doi.org/10.1126/science.1217501>.
- [12] T.E. Graedel, J. Allwood, J.-P. Birat, M. Buchert, C. Hagelüken, B.K. Reck, S.F. Sibley, G. Sonnemann, What do We know about metal recycling rates? *J. Ind. Ecol.* 15 (2011) 355–366, <http://dx.doi.org/10.1111/j.1530-9290.2011.00342.x>.
- [13] J.M. Allwood, M.F. Ashby, T.G. Gutowski, E. Worrell, Material efficiency: Providing material services with less material production, *Philos. Trans. R. Soc. A Math. Phys. Eng. Sci.* 371 (2013) 20120496, <http://dx.doi.org/10.1098/rsta.2012.0496>.
- [14] D. Kaufmann, A. Kraay, M. Mastruzzi, The Worldwide Governance Indicators: Methodology and Analytical Issues, *World Bank Policy Res. Work. Pap.* 5430, 2010.
- [15] A.M. Bradshaw, B. Reuter, T. Hamacher, The potential scarcity of rare elements for the Energiewende, *Green* 3 (2013) 93–111, <http://dx.doi.org/10.1515/green-2013-0014>.
- [16] N.T. Nassar, T.E. Graedel, E.M. Harper, By-product metals are technologically essential but have problematic supply, *Sci. Adv.* 1 (2015), e1400180. <http://dx.doi.org/10.1126/sciadv.1400180>.
- [17] T.E. Graedel, J. Barr, C. Chandler, T. Chase, J. Choi, L. Christoffersen, E. Friedlander, C. Henly, C. Jun, N.T. Nassar, D. Schechner, S. Warren, M. Yang, C. Zhu, Methodology of metal criticality determination, *Environ. Sci. Technol.* 46 (2012) 1063–1070, <http://dx.doi.org/10.1021/es203534z>.
- [18] T.E. Graedel, E.M. Harper, N.T. Nassar, P. Nuss, B.K. Reck, Criticality of metals and metalloids, *Proc. Natl. Acad. Sci.* 112 (2015) 4257–4262, <http://dx.doi.org/10.1073/pnas.1500415112>.
- [19] U.S. National Research Council, Minerals, Critical Minerals, and the U.S. Economy, The National Academies Press, Washington, DC, 2008.
- [20] L. Erdmann, T.E. Graedel, Criticality of non-fuel minerals: a review of major approaches and analyses, *Environ. Sci. Technol.* 45 (2011) 7620–7630, <http://dx.doi.org/10.1021/es200563g>.
- [21] B. Achzet, C. Helbig, How to evaluate raw material supply risks—an overview, *Res. Policy* 38 (2013) 435–447, <http://dx.doi.org/10.1016/j.resourpol.2013.06.003>.
- [22] B.B. Van Aken, T.T.M. Palstra, A. Filippetti, N.A. Spaldin, The origin of ferroelectricity in magnetoelectric YMnO_3 , *Nat. Mater.* 3 (2004) 164–170, <http://dx.doi.org/10.1038/nmat1080>.
- [23] V. Laukhin, V. Skumryev, X. Martí, D. Hrabovský, F. Sánchez, M.V. García-Cuenca, C. Ferrater, M. Varela, U. Lüders, J.F. Bobo, J. Fontcuberta, Electric-field control of exchange bias in multiferroic epitaxial heterostructures, *Phys. Rev. Lett.* 97 (2006) 227201, <http://dx.doi.org/10.1103/PhysRevLett.97.227201>.
- [24] N. Fujimura, T. Ishida, T. Yoshimura, T. Ito, Epitaxially grown YMnO_3 film: new candidate for nonvolatile memory devices, *Appl. Phys. Lett.* 69 (1996) 1011, <http://dx.doi.org/10.1063/1.117969>.
- [25] D. Meier, J. Seidel, A. Cano, K. Delaney, Y. Kumagai, M. Mostovoy, N.A. Spaldin, R. Ramesh, M. Fiebig, Anisotropic conductance at improper ferroelectric domain walls, *Nat. Mater.* 11 (2012) 284–288, <http://dx.doi.org/10.1038/nmat3249>.
- [26] J.A. Mundy, Y. Schaab, Y. Kumagai, A. Cano, M. Stengel, I.P. Krug, M. Gottlob, H. Doganay, E. Holtz, R. Held, Z. Yan, E. Bourret, C.M. Schneider, G. Schlom, D.A. Muller, R. Ramesh, N.A. Spaldin, D. Meier, *Nat. Mater.* (2017) (in press).
- [27] W. Eerenstein, N.D. Mathur, J.F. Scott, Multiferroic and magnetoelectric materials, *Nature* 442 (2006) 759–765, <http://dx.doi.org/10.1038/nature05023>.
- [28] M. Fiebig, T. Lottermoser, D. Fröhlich, A.V. Goltsev, R.V. Pisarev, Observation of coupled magnetic and electric domains, *Nature* 419 (2002) 818–820, <http://dx.doi.org/10.1038/nature01077>.
- [29] T. Choi, Y. Horibe, H.T. Yi, Y.J. Choi, W. Wu, S.-W. Cheong, Insulating interlocked ferroelectric and structural antiphase domain walls in multiferroic YMnO_3 , *Nat. Mater.* 9 (2010) 253–258, <http://dx.doi.org/10.1038/nmat2632>.
- [30] E. Ruff, S. Krohns, M. Lilienblum, D. Meier, M. Fiebig, P. Lunkenheimer, and A. Loidl, Conductivity Contrast and Tunneling Charge Transport in the Vortexlike Ferroelectric Domain Patterns of Multiferroic Hexagonal YMnO_3 , *Phys. Rev. Lett.* 118, 036803 – Published 20 January 2017 <http://dx.doi.org/10.1103/PhysRevLett.118.036803>
- [31] A. Bloodworth, Resources: track flows to manage technology-metal supply, *Nature* 505 (2014) 19–20, <http://dx.doi.org/10.1038/505019a>.
- [32] G. Angerer, F. Marschneider-Weidemann, A. Lüllmann, L. Erdmann, M. Scharp, V. Handke, M. Marwede, Raw materials for emerging technologies, Fraunhofer IRB Verlag, Stuttgart, 2009.
- [33] USGS, Mineral commodity summaries, U.S. Geol. Surv. 2015 (2015).
- [34] A.O. Hirschman, National Power and the Structure of Foreign Trade, University of California Press, 1980.

- [35] O.C. Herfindahl, Concentration in the US Steel Industry, Columbia University, 1950.
- [36] E. Andrews, P. Lesage, C. Benoît, J. Parent, G. Norris, J.-P. Revéret, Life cycle attribute assessment, *J. Ind. Ecol.* 13 (2009) 565–578, <http://dx.doi.org/10.1111/j.1530-9290.2009.00142.x>.
- [37] A. Emanuelsson, M. Goedkoop, M.M. Hanafiah, S. Hellweg, S. Hornborg, M.A.J. Huijbregts, T. Koellner, R. Leuven, L. Milà i Canals, M. Núñez, M. Obersteiner, S. Pfister, U. Sonesson, P. Storm, M. van der Velde, R. van Zelm, M. Vieira, F. Ziegler, Recommended Assessment Framework, Method and Characterisation and Normalisation Factors for Resource Use Impacts: Phase 1, LC-IMPACT, 2013.
- [38] V.D.R. Guide, T.P. Harrison, L.N. Van Wassenhove, The challenge of closed-loop supply chains, *Interfaces* 33 (2003) 3–6 (Providence) <http://dx.doi.org/10.1287/inte.33.6.3.25182>.
- [39] C. Nuss, R. Sahamie, D. Stindt, The reverse supply chain planning matrix: a classification scheme for planning problems in reverse logistics, *Int. J. Manag. Rev.* 17 (2015) 413–436, <http://dx.doi.org/10.1111/ijmr.12046>.
- [40] W. Haas, F. Krausmann, D. Wiedenhofer, M. Heinz, How circular is the global economy?: An assessment of material flows, waste production, and recycling in the European Union and the world in 2005, *J. Ind. Ecol.* 19 (2015) 765–777, <http://dx.doi.org/10.1111/jiec.12244>.
- [41] U.S. Department of Energy, Critical Materials Strategy, U.S. Department of Energy, Washington, 2011.
- [42] L. Erdmann, S. Behrendt, M. Feil, Kritische Rohstoffe für Deutschland, KfW Bankengruppe, Berlin, 2011.
- [43] T.E. Graedel, J. Allwood, J.-P. Birat, B.K. Reck, S.F. Sibley, G. Sonnemann, M. Buchert, C. Hagelüken, Recycling rates of metals—a status report, A Report of the Working Group on the Global Metal Flows to the International Resource Panel, UNEP, 2011.
- [44] SNL Metals & Mining, Raw Materials Data, Version 20, Sweden, 2014.
- [45] J.E. Tilton, G. Lagos, Assessing the long-run availability of copper, *Res. Policy* 32 (2007) 19–23, <http://dx.doi.org/10.1016/j.resourpol.2007.04.001>.
- [46] T. Jackson, K.P. Green, Fraser Institute Annual Survey of Mining Companies, 2014 2015 (<http://www.fraserinstitute.org/research-news/display.aspx?id=20902>).
- [47] M.J. Goedkoop, R. Heijung, M. Huijbregts, A. De Schryver, J. Struijs, R. van Zelm, ReCiPe, A life cycle impact assessment method which comprises harmonised category indicators at the midpoint and the endpoint level, First Edition Report I: Characterisation, first ed., 2009, 2008 (<http://www.lcia-recipe.net>).
- [48] ecoinvent Centre, ecoinvent data v2.2, Dübendorf, 2010.
- [49] USGS, Mineral Commodity Summaries 2003, 2003.
- [50] L. Ciacci, B.K. Reck, N.T. Nassar, T.E. Graedel, Lost by design, *Environ. Sci. Technol.* 49 (2015) 9443–9451, <http://dx.doi.org/10.1021/es505515z>.
- [51] N.T. Nassar, X. Du, T.E. Graedel, Criticality of the rare earth elements, *J. Ind. Ecol.* 19 (2015) 1044–1054, <http://dx.doi.org/10.1111/jiec.12237>.
- [52] K.T. Rim, K.H. Koo, J.S. Park, Toxicological evaluations of rare earths and their health impacts to workers: a literature review, *Saf. Health Work* 4 (2013) 12–26, <http://dx.doi.org/10.5491/SHAW.2013.4.1.12>.
- [53] G.B. Haxel, J.B. Hedrick, G.J. Orris, Rare earth elements—critical resources for high technology, *U.S. Geol. Surv. Fact Sheet* 87 (2002) 1–4.