

## Photovoltaic effect in blend systems and heterostructures of poly(p-phenylenevinylene) and c60

K. Feldrapp, Wolfgang Brütting, M. Schwoerer, M. Brettreich, A. Hirsch

### Angaben zur Veröffentlichung / Publication details:

Feldrapp, K., Wolfgang Brütting, M. Schwoerer, M. Brettreich, and A. Hirsch. 1999.  
"Photovoltaic effect in blend systems and heterostructures of poly(p-phenylenevinylene) and c60." *Synthetic Metals* 101 (1-3): 156–57.  
[https://doi.org/10.1016/s0379-6779\(98\)00696-1](https://doi.org/10.1016/s0379-6779(98)00696-1).

# Photovoltaic Effect in Blend Systems and Heterostructures of Poly(p-phenylenevinylene) and C<sub>60</sub>

K. Feldrapp<sup>a</sup>, W. Brütting<sup>a\*</sup>, M. Schwoerer<sup>a</sup>, M. Brettreich<sup>b</sup>, A. Hirsch<sup>b</sup>

<sup>a</sup> Experimentalphysik II, Universität Bayreuth, 95440 Bayreuth, Germany

<sup>b</sup> Organische Chemie II, Universität Erlangen-Nürnberg, 91054 Erlangen, Germany

## Abstract

The photovoltaic effect in Poly(p-phenylenevinylene) (PPV) can be increased by an effective charge separation. In order to suppress the recombination of photogenerated charge carriers, it is useful to support the electron transfer from the semiconducting polymer (PPV) to an electron acceptor (C<sub>60</sub>). We have built heterostructures of PPV and sublimed C<sub>60</sub> on the one hand and blend systems of PPV with a methanole soluble C<sub>60</sub> on the other hand. For this purpose a dendrimer with a C<sub>60</sub> core has been synthesized to make the fullerene soluble in the precursor PPV. The photovoltaic properties are investigated in these blends and heterojunction devices sandwiched between ITO and Al.

**Keywords:** Heterojunctions, Poly(para-phenylenevinylene), Fullerenes, Solar Cells

## 1. Introduction

Energy conversion efficiencies of photovoltaic cells using a single layer of a conjugated polymer are usually very low ( $10^{-3}$ – $10^{-2}$  %) [1,2,3]. Major cause is the recombination of excitons created by the incident light. G. Yu showed that the efficiency in blends of the conjugated polymer Poly(para-phenylene-vinylene) (PPV) and the buckminsterfullerene C<sub>60</sub> increases dramatically [4]. The quantum yields were raised up to 29 %, because exciton separation was achieved by an ultrafast electron transfer from the polymer to the C<sub>60</sub>. This transfer is about 1000 times faster than the competing radiative and non-radiative processes [5]. Halls et al. also achieved an increase of the quantum yield up to 9 % by using heterostructures of PPV and C<sub>60</sub> [6].

We have built heterostructures of PPV and sublimed C<sub>60</sub> on the one hand and blend systems of PPV with a methanole soluble C<sub>60</sub> on the other hand. For this purpose a dendrimer with a C<sub>60</sub> core has been synthesized to make the fullerene soluble in the precursor PPV.

## 2. Experimental

PPV is synthesized via the sulfonium salt precursor route [7]. By thermal treatment at 160–180 °C the soluble precursor polymer is converted to the non-soluble PPV. The films of the precursor polymer were prepared by a doctorblade-technique from methanole solution onto ITO-coated glass. The C<sub>60</sub> was thermally evaporated onto the converted PPV-film in the case of heterojunctions.

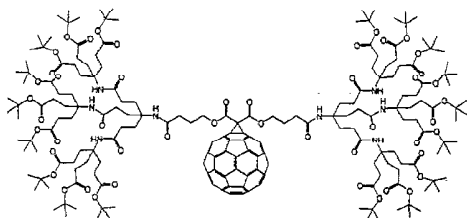


Fig. 1: Structure of the methanole soluble C<sub>60</sub>-dendrimer

The blend systems were prepared from a mixture of the methanole-soluble C<sub>60</sub>-derivative in several concentrations with the PPV precursor solution. Hence the C<sub>60</sub>-derivative is thermally treated together with the PPV. As top electrode aluminium was used. Fig. 1 shows the functionalized C<sub>60</sub> dendrimer. The molecular weight is 3837.7 g/mol. The devices were prepared in a nitrogen filled glove box. After preparation the samples were brought to ambient conditions before mounting them in a vacuum chamber.

The devices were electrically characterized under vacuum ( $10^{-3}$  mbar). A 150 W-Xenon lamp and a monochromator were used to illuminate the samples through the ITO-electrode. Short circuit photocurrent spectra were measured with an electrometer, the I-V-curves were investigated by a Source-Measure-Unit. Furthermore, a Scanning Electron Microscope could give details of the surface structure of the samples.

## 3. Results and Discussion

### 3.1. Photoluminescence

Because of the ultrafast electron transfer from the PPV to the C<sub>60</sub> the photoluminescence of PPV is expected to be quenched [5]. In the blends the molar concentrations of PPV-monomer to C<sub>60</sub> reach from 18:1 to 2:1. The latter means that two monomer-units of PPV come together with one C<sub>60</sub>-ball. The obtained quantum yields of the photoluminescence of PPV  $\eta_{PL}$  are given in table 1.

C <sub>60</sub> :PPV	0	1:18	1:9	1:2
$\eta_{PL}$ in %	6.6	2.7	1.5	0.7

Table 1: Quantum yield of the photoluminescence of PPV for different molar concentrations of C<sub>60</sub> in PPV.

### 3.2. Photocurrent spectra

Fig. 2 compares short circuit photocurrent spectra of a single-layer, a two-layer and a blend system. In a single-layer device the excitons are separated within the depletion layer of the Schottky-contact at the PPV/Al interface [1]. Thus the major amount of light absorbed close to the ITO interface does not contribute to the photocurrent. In a blend system, however, the charge carriers should be separated in the whole bulk of the polymer. With

\* Corresponding author, Email: wolfgang.brutting@uni-bayreuth.de

increasing  $C_{60}$  content the photocurrent in the spectral range of 350-480nm grows. This indicates that the excitons generated in the bulk are separated and contribute to the photocurrent. The wavelength range above 480nm is dominated by the charge separation at the Schottky contact. The two-layer-system has an additional peak at 620nm. This peak can be explained by the absorption of  $C_{60}$ . The current in the two layer system is one magnitude larger than in the blend system. This indicates that in spite of the charge separation occurring in the whole PPV/ $C_{60}$  layer, the transport of carriers in the blend systems is worse than in the individual layers.

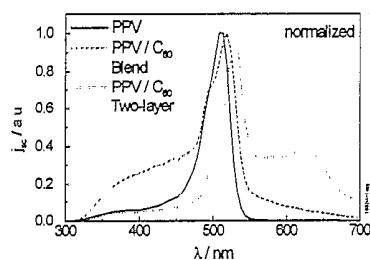


Fig. 2: Normalized short circuit photocurrent spectra of a PPV single-layer, a PPV/ $C_{60}$  two-layer and a blend system.

### 3.3. Current-voltage characteristics

Quantum yields and power efficiency can be determined from I-V-curves. Fig. 3 compares a single-layer PPV device, a two-layer system and a blend system in the dark and under monochromatic illumination at 520nm with an intensity of  $100\mu\text{W}/\text{cm}^2$ .

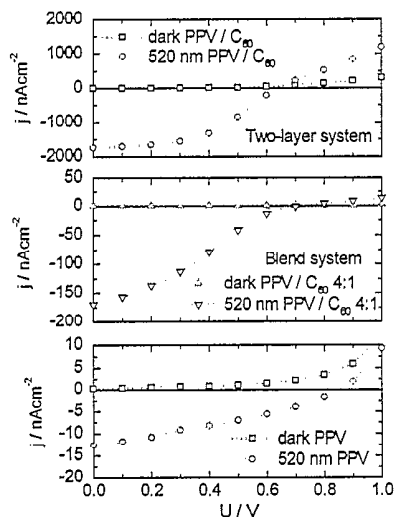


Fig. 3: I-V-curves of a PPV single-layer, a two-layer and a PPV/ $C_{60}$  blend system in the dark and under illumination at 520nm with  $100\mu\text{W}/\text{cm}^2$ .

Table 2 shows that the efficiencies of the two-layer system are almost one order of magnitude larger than of the blend systems and two orders of magnitude higher than in the PPV single-layer device. The transport in the two-layer systems is significantly better than in the blend systems as can be seen from the short circuit current. The open circuit voltage in the blend and the two-layer systems is smaller than in the single-layer systems. Probably the LUMO of  $C_{60}$  which is 0.7eV below the LUMO of PPV decreases  $U_{oc}$ .

	PPV	PPV/ $C_{60}$ blend system	PPV/ $C_{60}$ two- layer system
$U_{oc}/\text{V}$	0.85	0.7	0.65
$j_{sc}/\text{nAcm}^{-2}$	13	170	1800
$\eta_c$ in %	0.03	0.4	4.4
$\eta_e$ in %	0.003	0.03	0.5
FF	0.32	0.29	0.47

Table 2: Comparison of single-layer, blend and two-layer systems under monochromatic illumination at 520nm with  $100\mu\text{W}/\text{cm}^2$ . ( $U_{oc}$ : open circuit voltage,  $j_{sc}$ : short circuit current density,  $\eta_c$ : quantum yield,  $\eta_e$ : external power efficiency, FF: filling factor).

### 3.4. Scanning Electron Microscopy

The morphology of the films has been studied by a SEM. PPV films show no structures, the surface is smooth. The blend systems, however, have a structure like a cratered landscape (Fig.4). The density of the craters increases with the film thickness and the  $C_{60}$ -concentration. Reactions of the precursor leaving groups (thioether and HCl) with the  $C_{60}$  while the prepolymer is thermally converted to PPV, the occurrence of phase separation and the escape of residual solvents are probable reasons for these craters. Obviously these structural changes are responsible for the bad electrical transport properties of the blend system.

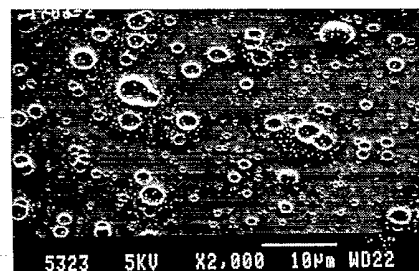


Fig. 4: SEM image of a PPV/ $C_{60}$  blend film.

## 4. Conclusion

Heterojunctions and blend systems of PPV and  $C_{60}$  have been compared. To realize the blend with precursor route PPV, a methanole soluble  $C_{60}$  has been synthesized. Although an electron transfer from PPV to  $C_{60}$  occurs in the whole PPV bulk, as indicated by photoluminescence quenching and photocurrent spectra, the efficiencies in the PPV/ $C_{60}$  blends are about one order of magnitude lower than in PPV/ $C_{60}$  heterostructures. This indicates that charge carrier transport in the blend systems is worse than in pure PPV and  $C_{60}$  layers. As possible reasons for this we could identify morphological inhomogenities of the PPV/ $C_{60}$  blends.

## 5. References

- [1] S. Karg et al., Synth. Met. 54 (1-3), 427 (1993)
- [2] R.N. Marks et al., J. Phys.: Cond. Matter 6, 1379 (1994)
- [3] G. Yu et al., Appl. Phys. Lett. 64, 1540 (1994)
- [4] G. Yu et al., Science 270, 1789, 1995
- [5] N.S. Sariciftci et al., Science, 1474, 1992
- [6] J.J.M. Halls et al., Appl. Phys. Lett. 68 (22), 3120, 1996
- [7] J. Gmeiner et al., Acta Polym. 4, 201, 1993

## Acknowledgement

We thank J. Gmeiner for providing the PPV precursor and W. Schütz for experimental assistance. Financial support by the Sonderforschungsbereich 481 and the Bayerische Forschungsförderung (FOROPTO II) are gratefully acknowledged.