

Decision-theoretic personality-based reasoning about turn-taking conflicts

Kathrin Janowski, Elisabeth André

Angaben zur Veröffentlichung / Publication details:

Janowski, Kathrin, and Elisabeth André. 2018. "Decision-theoretic personality-based reasoning about turn-taking conflicts." In Proceedings of the 18th International Conference on Intelligent Virtual Agents - IVA '18: Sydney, NSW, Australia — November 05 - 08, 2018, edited by Anton Bogdanovych, Deborah Richards, and Simeon Simoff, 349–50. New York, NY: ACM Press. <https://doi.org/10.1145/3267851.3267899>.

Nutzungsbedingungen / Terms of use:

licgercopyright

Dieses Dokument wird unter folgenden Bedingungen zur Verfügung gestellt: / This document is made available under the following conditions:

Deutsches Urheberrecht

Weitere Informationen finden Sie unter: / For more information see:

<https://www.uni-augsburg.de/de/organisation/bibliothek/publizieren-zitieren-archivieren/publizieren>



Decision-Theoretic Personality-Based Reasoning about Turn-Taking Conflicts

Extended Abstract

Kathrin Janowski

Human Centered Multimedia, Augsburg University
Augsburg, Germany
kathrin.janowski@informatik.uni-augsburg.de

Elisabeth André

Human Centered Multimedia, Augsburg University
Augsburg, Germany
andre@informatik.uni-augsburg.de

ABSTRACT

This paper outlines the use of an influence diagram for modeling turn-taking timing. In contrast to related works, our model focuses on an agent's personality and attitude towards the conversation partner. We also describe how this model is implemented in a first prototype application.

CCS CONCEPTS

• **Human-centered computing** → **Systems and tools for interaction design**; *HCI theory, concepts and models*;

KEYWORDS

human-agent interaction, personality modeling, interpersonal stance, turn taking conflicts, interruptions, decision-theoretic approach, influence diagram, Bayesian network

ACM Reference Format:

Kathrin Janowski and Elisabeth André. 2018. Decision-Theoretic Personality-Based Reasoning about Turn-Taking Conflicts: Extended Abstract. In *IVA '18: International Conference on Intelligent Virtual Agents (IVA '18)*, November 5–8, 2018, Sydney, NSW, Australia. ACM, New York, NY, USA, Article 4, 2 pages. <https://doi.org/10.1145/3267851.3267899>

1 INTRODUCTION

Talking computer-controlled agents are becoming more and more prevalent in our society. They may be disembodied voice assistants like Amazon's Alexa. They may be social robots, sitting on your living room table or roaming the stores. They may be virtual actors in simulated role play for cultural coaching or job interview training. All of them require appropriate floor management in order to interact with humans in a natural, intuitive and fluent manner. They need to know when they are allowed or expected to speak, when they have to yield their turn to the user, and when they have to stand their ground in order to deliver a crucial message. Furthermore, humans tend to attribute social characteristics to such characters, meaning that their behavior also needs to be consistent with the interpersonal dynamics required by the scenario.

The timing of a person's speech is closely related to their personality and their attitude towards the other participants. For instance,

IVA '18, November 5–8, 2018, Sydney, NSW, Australia © 2018 Copyright held by the owner/author(s). ACM ISBN 978-1-4503-6013-5/18/11.

. This is the author's version of the work. It is posted here for your personal use. Not for redistribution. The definitive Version of Record was published at <https://doi.org/10.1145/3267851.3267899>

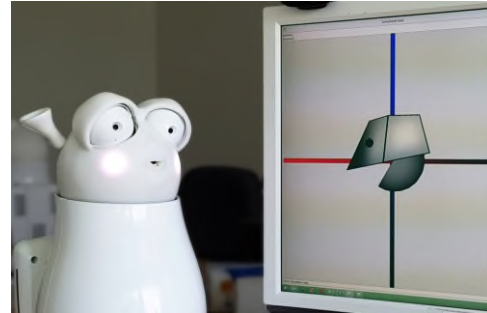


Figure 1: Reeti robot in conversation with PseudoBot agent.

dominant people are known to interrupt others more often [8]. Likewise, virtual agents who start speaking before the other party had finished have been rated as less agreeable than those who started afterwards [9], and those who are interrupted appear more dominant and less friendly when they continue speaking instead of backing down [2, 9]. However, overlapping speech is not always a sign of dominance or unfriendliness [6]. Sometimes it can indicate enthusiasm and involvement, which are signs of good rapport and collaboration between the participants.

Consequently, conversational timing between agents and humans needs to be calculated from a wide range of interaction goals and influence factors. Further challenges arise from uncertainty caused by sensor noise or semantic ambiguities. One common answer to these problems is a decision-theoretic approach. For this, the system calculates the probabilities of achieving different outcomes, which in turn carry costs and benefits for the agent's goals. The expected utility of each available action is then used to find the most rewarding strategy. For example, Bohus and Horvitz [1] applied this approach to the turn-taking of a virtual quizmaster. While they did not model the agent's personality or attitude towards the players, they already accounted for uncertain observations and balanced the risk of overlapping speech against that of unnecessary silence. Conati [4] described a virtual butler which uses a dynamic decision network to infer the user's emotional state and its causes from noisy or incomplete inputs. This way the system actions can be scheduled for the time at which it causes the least harm or even improves the user's mood.

We adopt a similar approach to the works described above [1, 4], but focus on the impact which personality and interpersonal stance have on a conversational agent's turn-taking behavior.

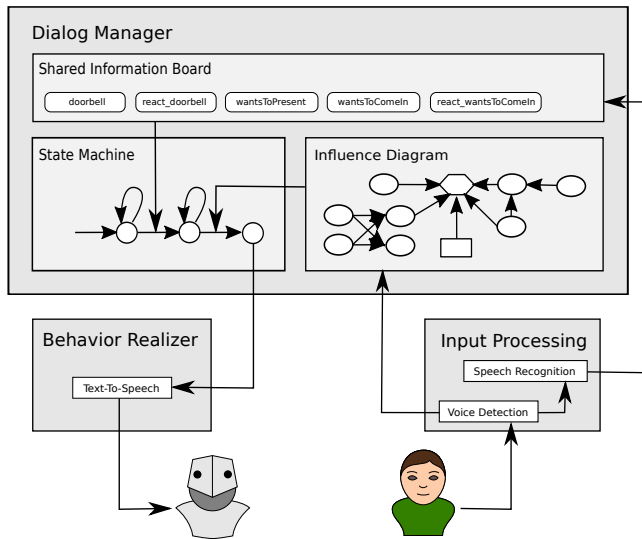


Figure 2: The architecture of our first prototype application.

2 PROTOTYPE IMPLEMENTATION

This section will describe the implementation of our first proof-of-concept prototype. Figure 2 shows its most relevant components.

2.1 Conversational Agents

In order to test the computational model with noise-free, reproducible input, we chose to simulate conversations between two computer-controlled agents.¹

The dialog manager uses a generic messaging protocol for connecting to different virtual characters or social robots. At the moment, we have compatible behavior realizers for a virtual character called "PseudoBot" and the Reeti robot², both of which can be seen in figure 1. Another behavior realizer for the NAO robot³ is in progress, and we also plan to connect our system to more realistic virtual humans in the future.

2.2 Shared Information Board

The Shared Information Board collects the semantic content of each utterance spoken by any participant. This information is written to the board as soon as the "Minimum Necessary Information" (MNI for short) has been transmitted, which Chao [3] defined as the part of a communicative action after which a human would feel confident about its meaning. For example, this could be the name of a referenced object or the verb for a requested action. Therefore, the end of the MNI marks the earliest point in time at which the interlocutor's response will begin. For simple scenarios, this information can be marked by hand. We did so by inserting bookmarks into the text-to-speech commands for both agents which will trigger the addition of the MNI to the Shared Information Board.

¹Examples for the generated behavior can be seen here: https://www.youtube.com/playlist?list=PLAJ5ZtqkzFRtaO_kK9qPKvjxjzMWawBq

²<http://www.reeti.fr>

³<https://www.softbankrobotics.com>

2.3 Influence Diagram

An influence diagram is a Bayesian network with added nodes for decisions and their utilities. We use these utilities to model interaction goals and events that affect them, while their magnitude expresses the goals' priorities depending on the context.

The agent's attitude towards the user is modeled as chance nodes in the Bayesian network, based on psychological findings about the relationship between the Big Five personality factors and the Interpersonal Circumplex [5, 7]. This allows us to either configure the agent's personality from which the attitude towards the interlocutor is derived, or override this default interpersonal stance with situational information, such as the relative dominance based on the agent's task-related role.

The conversational role - *speaker* or *listener* - is represented by one chance node per participant. While the agent's intentions are known to the system, the (simulated) user's intended role can only be inferred from their observed behavior parameters, such as their voice activity and its duration. The influence diagram is updated with every new observation to reflect the knowledge about both participants. Whenever the dialog manager proposes a communicative action, it is delayed until the expected utility for executing it exceeds that of waiting. Vice versa, it is aborted when waiting becomes more lucrative.

Our current model covers only one single interaction goal, which is to *exert control* over the conversation. We chose this goal because the effect of dominance on turn-taking is already well documented in the literature [2, 8, 9]. The utilities for this goal were chosen based on those existing findings about how dominant a character's speech timing is perceived. Key combinations between situational variables were assigned utilities of 1.0 or -1.0 and the remaining values were inter- and extrapolated for all possible combinations of the agent's own role, the other party's role, the other party's speech or silence duration and the dominance expressed by the agent.

REFERENCES

- [1] Dan Bohus and Eric Horvitz. 2011. Decisions about turns in multiparty conversation: from perception to action. In *Proceedings of the 13th international conference on multimodal interfaces*. ACM, 153–160.
- [2] Angelo Cafaro, Nadine Glas, and Catherine Pelachaud. 2016. The effects of interrupting behavior on interpersonal attitude and engagement in dyadic interactions. In *Proceedings of the 2016 International Conference on Autonomous Agents & Multiagent Systems*. International Foundation for Autonomous Agents and Multiagent Systems, 911–920.
- [3] Crystal Chao. 2015. *Timing multimodal turn-taking in human-robot cooperative activity*. Ph.D. Dissertation. Georgia Institute of Technology.
- [4] Cristina Conati. 2013. Virtual Butler: What Can We Learn from Adaptive User Interfaces? In *Your Virtual Butler*, Robert Trapp (Ed.). Lecture Notes in Computer Science, Vol. 7407. Springer Berlin Heidelberg, 29–41.
- [5] Colin G. DeYoung, Yanna J. Weisberg, Lena C. Quilty, and Jordan B. Peterson. 2013. Unifying the Aspects of the Big Five, the Interpersonal Circumplex, and Trait Affiliation. *Journal of Personality* 81, 5 (2013), 465–475.
- [6] Julia A. Goldberg. 1990. Interrupting the discourse on interruptions: An analysis in terms of relationally neutral, power- and rapport-oriented acts. *Journal of Pragmatics* 14, 6 (1990), 883 – 903.
- [7] Robert R McCrae and Paul T Costa. 1989. The structure of interpersonal traits: Wiggins's circumplex and the five-factor model. *Journal of personality and social psychology* 56, 4 (1989), 586.
- [8] William T. Rogers and Stanley S. Jones. 1975. Effects Of Dominance Tendencies On Floor Holding And Interruption Behavior In Dyadic Interaction. *Human Communication Research* 1, 2 (1975), 113–122.
- [9] Mark ter Maat, Khiet Phuong Truong, and Dirk K. J. Heylen. 2011. How Agents' Turn-Taking Strategies Influence Impressions and Response Behaviors. *Presence: Teleoperators and Virtual Environments* 20, 5 (Oct. 2011), 412–430.